






## ENERG Y UA EHEPΓИЯ · ενεργεια IE IA



NIBE S735-7 E

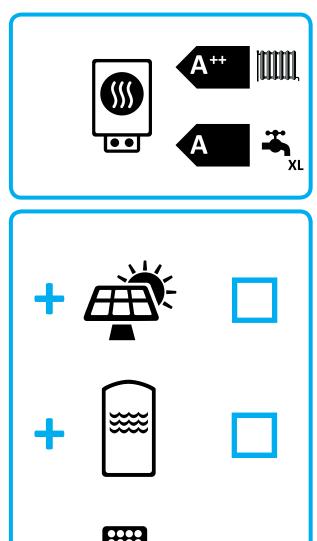

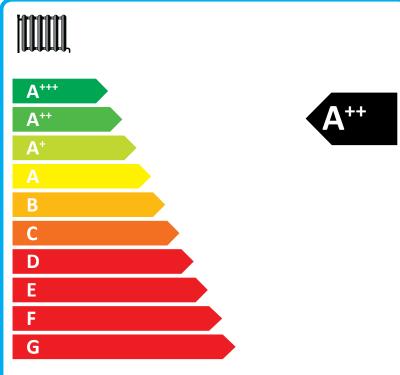

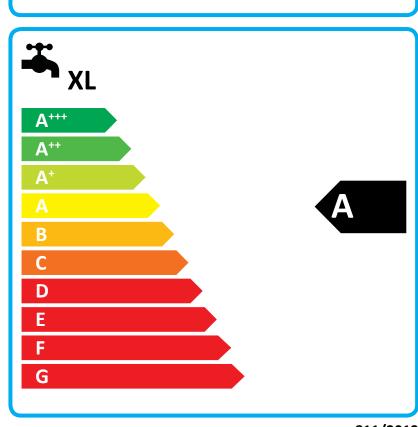

Supplier's name:	NIBE				
Model:	NIBE S7				
Temperature application	35	55	°C		
Declared load profile for water	XL				
heating	ΛL	•			
Seasonal space heating energy	<b>.</b>	۸			
efficiency class, average climate:	A+++	A++			
Water heating energy efficiency	Λ				
class, average climate:	A	A			
Rated heat output, average climate:	6	6	kW		
Annual energy consumption for	0574	0.450	1.30/1		
space heating, average climate	2571	3156	kWh		
Annual electricity consumption for	143	2	1-10/1-		
water heating, average climate	143	2	kWh		
Seasonal space heating energy	177	144	%		
efficiency, average climate:	177	144	%		
Water heating energy efficiency,	117	%			
average climate:	111	%			
Sound power level LWA indoors	44	dB			
Rated heat output, cold climate:	6	6	kW		
Rated heat output, warm climate:	6	6	kW		
Annual energy consumption for	2905 3622		kWh		
space heating, cold climate	2903	3022	KVVII		
Annual electricity consumption for	143	kWh			
water heating, cold climate	143	KVVII			
Annual energy consumption for	1695	2070	kWh		
space heating, warm climate	1093	2010	KVVII		
Annual electricity consumption for	143	kWh			
water heating, warm climate		KVVII			
Seasonal space heating energy	187	149	%		
efficiency, cold climate:	101	170	/0		
Water heating energy efficiency,	117	%			
cold climate:	117		/0		
Seasonal space heating energy	174	142	%		
efficiency, warm climate:	1/4 142		/0		
Water heating energy efficiency,	117	7	%		
warm climate:					
Sound power level LWA outdoors	-		dB		

## Data for package fiche

Controller class	VI		
Controler contribution to efficiency	4	%	
Seasonal space heating energy efficiency of package, average climate:	181	148	%
Seasonal space heating energy efficiency class for package, average climate:	A+++	A++	%
Seasonal space heating energy efficiency of package, cold climate:	191	153	%
Seasonal space heating energy efficiency of package, warm climate:	178	146	%

Model(s):			NII	BE \$735-7 E			
Type of heat source/sink:			Exha	ust air/water			
Low-temperature heat pump:		No		No			
Equipped with supplementary heater:				Yes			- K)
Heat pump combination heater:				Yes	T .		
Climate condition:				Average			
Temperature application:		ı	Medium te	emperature (55 °C)			
Applied standards: EN14825 - EN16147	7 - EN12102-	1					
				Seasonal space heating energy			
Rated heat output	Prated	5,6	kW	efficiency	$\eta_{\text{s}}$	144	%
Declared capacity for part load at outdoor ten	nperature Ti			Declared coefficient of performance for p	art load at outdo	or temperatu	re Ti
Tj = -7 °C	Pdh	4,9	kW	Ti = -7 °C	COPd	2,52	
Tj = +2 °C	Pdh	3,0	kW	Tj = +2 °C	COPd	3,77	
Tj = +7 °C	Pdh	2,0	kW	Tj = +7 °C	COPd	4,53	
Tj = +12 °C	Pdh	1,5	kW	Tj = +12 °C	COPd	5,20	
Tj = biv	Pdh	5,5	kW	Tj = biv	COPd	2,33	
Tj = TOL	Pdh	5,5	kW	Tj = TOL	COPd	2,33	
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW	Tj = -15 °C (if TOL < -20 °C)	COPd		
Bivalent temperature	T <sub>biv</sub>	-10	°C	Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	Pcych		kW	Cycling interval efficiency	COPcyc		_
Degradation co-efficient	Cdh	0,87	-	Heating water operating limit	WTOL	65	°C
Power consumption in modes other than activ	ua moda			Supplementary heater			
Off mode	P <sub>OFF</sub>	0,008	kW	Rated heat output	Psup	0,0	kW
Thermostat-off mode	P <sub>TO</sub>	0,038	kW	1			
Standby mode	P <sub>SB</sub>	0,034	kW	Type of energy input		Electric	
Crankcase heater mode	P <sub>CK</sub>	0,008	kW		•		

For	heat	pump	combination	heater:

Annual energy consumption

Sound power level, indoors/outdoors

Declared load profile		XL		Water heating energy efficiency	$\eta_{wh}$	117	%
Daily electricity consumption	Q <sub>elec</sub>	6,90	kWh	Daily fuel consumption	Q <sub>fuel</sub>		kWh
Annual electricity consumption	AEC	1432	kWh	Annual fuel consumption	AFC		GJ

Rated air flow rate, outdoors

Rated brine or water flow rate,

outdoor heat exchanger

exchanger

Rated water flow rate, indoor heat

239,00

0,47

m³/h

m³/h

m³/h

## Approved by:

Other items

Capacity control

Contact details	© NIBE Energy Systems - Box 14 - Hannabadsvägen 5 - 28521 Markaryd - Sweden
-----------------	---

dB

kWh

Variable

 $\mathsf{L}_{\mathsf{WA}}$ 

 $\mathbf{Q}_{\mathsf{HE}}$ 

44/-

3156